

Technical Data Sheet

Our Impact Protection profiles provide both visual warning and safety cushioning to hard, unyielding objects.

- Prevents injury and protects property.
- Quick and easy to install.
- High quality moulded sections.
- Standard lengths of 1,000mm.
- Easily cut to length with sharp knife or fine saw blade.
- Made from flexible age resistant polyurethane foam.
- UV resistant yellow/black colours according to DIN 4844.
- Temperature resistant from -40 °C to + 90°C.
- Fire resistant.
- CFC and silicon free.
- Suitable for internal and external applications.



Impact Protection

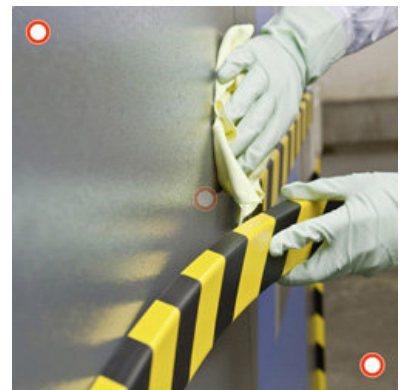
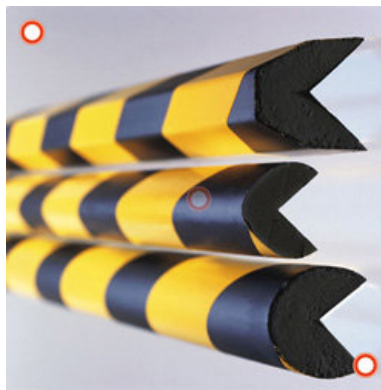
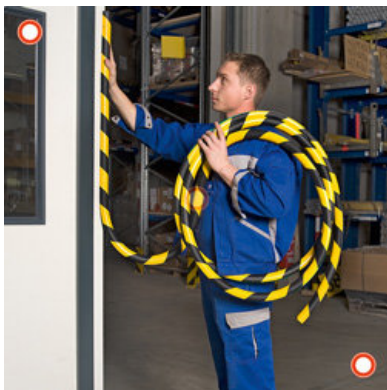
Applications:

Internal and external machinery, racking, conveyers, vehicles, mobile trolleys, corners, columns, girders, production areas, transfer routes, hospitals, laboratories etc.

Installation:

Self-adhesive backed profiles can be permanently fixed to smooth, dust and grease-free surfaces on corners and edges.

Magnetic profiles are an innovative development of our PU foam Impact Protection profiles. The magnetic strips are an integral part of the profile. A simple solution for applications that do not require permanent protection, or areas that require regular operations such as cleaning, painting etc.



Certificate Number: 14352
 ISO 9001



Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.








Web: www.epdm.co.uk

E-Mail: Sales@epdm.co.uk

Contact

Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom

Impact Protection

Trapeze	Colour	Length (mm)	Width (mm)	Thickness (mm)	Fixture	Weight (kg)	
	yellow/black	1000	40	40	self-adhesive	0.70	
					magnetic	0.70	
Right-Angle	Colour	Length (mm)	Height (mm)	Width (mm)	Thickness (mm)	Fixture	Weight (kg)
	uni-colour white	1000	30	30	10	self-adhesive	0.50
						self-adhesive	0.50
	yellow/black	1000	60	60	10	magnetic	0.50
	yellow/black					self-adhesive	0.80
	yellow/black		60	60		magnetic	0.80
	yellow/black					self-adhesive	0.80
	yellow/black	5000	26	26	7	self-adhesive	2.20
	yellow/black		47	47	12	self-adhesive	2.70
Semi-Circular	Colour	Length (mm)	Diameter (mm)	Thickness (mm)	Weight (kg)	Fixture	
	uni-colour white	1000	40	20	0.70	self-adhesive	
		1000					
	yellow/black	1000		40	0.70	self-adhesive	
	yellow/black	1000		40	0.70	magnetic	
	yellow/black	5000	15	2.30	self-adhesive		









Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

Web: www.epdm.co.uk
E-Mail: Sales@epdm.co.uk

Contact
 Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom



Impact Protection

Impact Protection Foam, Self-Adhesive, Semi-Circular	Type	Function	Colour	Edge length (mm)	Weight (kg)
	three-leg	Corner protection - outside corner	black	45	0.20
	three-leg	Corner protection - outside corner	white	45	0.20
	two-leg	Corner protection - outside corner	black	45	0.20
	two-leg	Corner protection - outside corner	white	45	0.20
	two-leg	Corner protection for inner corner	black	45	0.20
	three-leg	Corner protection - outside corner	black	80	0.20
	two-leg	Corner protection - outside corner	black	80	0.20
	two-leg	Corner protection for inner corner	black	80	0.20



Certificate Number: 14352
 ISO 9001



Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

Web: www.epdm.co.uk

E-Mail: Sales@epdm.co.uk

Contact

Telephone: +44 (0)1625 573971

FAX: +44 (0)1625 573250

Munsch & Co/PTM Ltd

Units AG2/3 Clarence Mill





Clarence Road, Bollington

Macclesfield, Cheshire

SK10 5JZ

United Kingdom

Impact Protection

Protection Foam Trapeze	Colour	Fixture	Length (mm)	Width (mm)	Thickness (mm)	Weight (kg)
	yellow/black	self-adhesive	1000	40	40	0.70
		magnetic				0.70
Impact Protection Foam, Semi-Circular	Colour	Fixture	Length (mm)	Width (mm)	Thickness (mm)	Weight (kg)
	yellow/black	self-adhesive	1000	40	32	0.70
		self-adhesive	1000			0.70
		magnetic	1000			0.70
		self-adhesive	5000			2.50
Impact Protection Foam, Rectangle	Colour	Fixture	Length (mm)	Width (mm)	Thickness (mm)	Weight (kg)
	yellow/black	self-adhesive	1000	60	20	0.70
			1000			
			1000			
		magnetic	1000	200	1.20	
		with 3 bores	1000			
with 4 bores	500	50	2.70			
self-adhesive	5000					
	yellow/black	self-adhesive	5000	40	11	2.40



Certificate Number: 14352
 ISO 9001










Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

Web: www.epdm.co.uk
E-Mail: Sales@epdm.co.uk

Contact
 Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom

Impact Protection

Impact Protection Foam, Push-Fit, Trapeze	Colour	Length (mm)	Width (mm)	Thickness (mm)	Weight (kg)
	yellow/black	1000	40	40	0.50
	yellow/black			80	0.80
Impact Protection Foam, Push-Fit, Semi-Circular	Colour	Length (mm)	Diameter (mm)	Groove depth (mm)	Weight (kg)
	uni-colour white	1000	40	20	0.40
	yellow/black	1000			0.40
	yellow/black	5000			2.40
Impact Protection Foam, Push-Fit, Rectangle	Colour	Length (mm)	Width (mm)	Thickness (mm)	Weight (kg)
	yellow/black	1000	25	30	0.70
	yellow/black	5000			2.20



Certificate Number: 14352
 ISO 9001






Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

Web: www.epdm.co.uk
E-Mail: Sales@epdm.co.uk

Contact
 Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom

Impact Protection

Impact Protection Foam, Self-Adhesive, Pipe	Colour	Length (mm)	Width (mm)	Inside diam. (mm)	Radius (mm)	Thickness (mm)	Fixture	Weight (kg)
	yellow/black	1000	80	40	37	20	self-adhesive	1.00
						20	magnetic	1.00
			100	60	50	20	self-adhesive	2.00
						20	magnetic	2.00
			135	85	67	25	self-adhesive	2.50
						25	magnetic	2.50
Impact Protection Foam, For Columns, Rectangle	Type	Height (mm)	Width (mm)	Thickness (mm)	Weight (kg)			
	for corner pillars	200	500	20	1.60			
	for round pillars							
Corner Protectors	Width	Height	Length	Weight (kg)				
	90	90	800	2.00				
	115	115						



Certificate Number: 14352
 ISO 9001



Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

Web: www.epdm.co.uk
E-Mail: Sales@epdm.co.uk

Contact

Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom