


Technical Data Sheet

40 Sh. A Translucent Silicone Rubber

CHEMICAL DESCRIPTION: Polysiloxane, PMQ, VMQ

PHYSICAL PROPERTIES

TENSILE STRENGTH: 6 - 7 MPa Min.
 COMPRESSION SET: 35% Max.
 24 Hours @ 150°C
 ELONGATION AT BREAK: 300% Min.
 THERMAL CONDUCTIVITY : 0.24 W.m⁻¹.K⁻¹ (VDE 0304)
 HARDNESS RANGE: 40° Sh. A +/- 5 ° Sh.
 TEMPERATURE RANGE: -60° - +230° C Continuous, +250° C Intermittent
 OZONE RESISTANCE: Excellent
 RESILIENCE: Poor

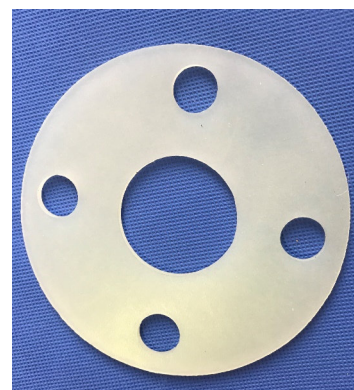

CHEMICAL RESISTANCE

WATER: Good
 ACIDS: Poor
 DRY HEAT: Excellent

Silicone is unique when compared with other synthetic rubbers, in so much as its molecular chain does not contain carbon. Instead it contains alternating atoms of silicon (Si) and oxygen. This combination is called polysiloxane. This unique feature contributes to many of its outstanding performance characteristics.

Silicone rubber is physiologically inert, thus making it the preferred choice of the medical, pharmaceutical and food processing industries.

All W.C. Munsch (SI40 Grade) silicone sheets conform to BS: EN: 2260: 1995, FDA REGULATIONS FDA 21 CFR 177.2600, EC-1935:2004 and are WRAS Approved. This grade is 40 Sh A to assist sealing at low pressure.



EC1935:2004



Complies with FDA Food Contact Regulation 21 CFR177-2600

ELASTOMERS



Certificate Number: 14352
 ISO 9001



Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

www.epdm.co.uk

E-Mail: Sales@epdm.co.uk

Contact

Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom