


PROTECTION SCREENS

Protector 100

Portable welding frames, protection screens & bespoke booths and curtains
 The necessary solution for employee protection.

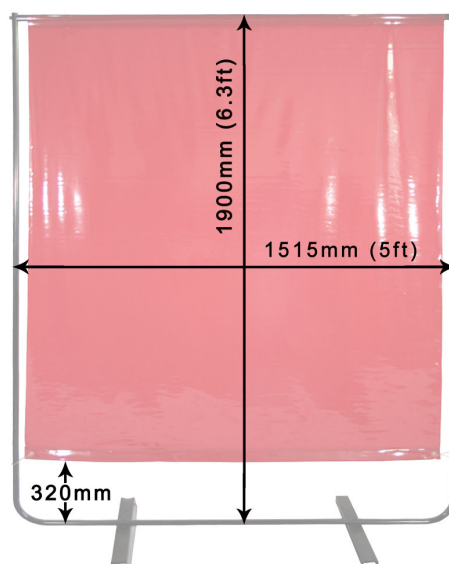

These entry level screens come with a solid 1-piece welding curtain, attached through the top rail and tensioned to both bottom corners with the two retention clips supplied. These can be assembled in minutes using the familiar "click & lock" system, whilst the lightweight frame design means it can be easily manoeuvred around the workshop. The red screens adhere to EN1598 welding standard, therefore offering all the necessary protection from welding flash & ignition.

STOCK COLOUR	RED, CLEAR
OUTER FRAME DIMENSIONS	1520MM (5FT) W X 1900MM (6FT 3") H
FRAME TYPE	22.5MM DIAMETER POWDER COATED STEEL TUBE FRAME
PVC CURTAIN DIMENSIONS	1415MM (4FT 6") W X 1580MM (5FT 2") H
CURTAIN FROM FLOOR	320MM
PVC CURTAIN THICKNESS	0.4MM (EN1598 APPLIES TO RED)
OUTER CARTON	1720MM L X 280MM D X 70MM H



Certificate Number: 14352
 ISO 9001



Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

www.epdm.co.uk

E-Mail: Sales@epdm.co.uk

Contact

Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom

PROTECTION SCREENS

Protector 200

Portable welding frames, protection screens & bespoke booths and curtains
 The necessary solution for employee protection.



Offering all the same benefits as the Protector 100, but manufactured with a sturdier and heavier grade frame – 30mm OD and 4kgs heavier. The solid 1 piece curtain is attached through both a top and bottom rail.

The red welding screens adhere to EN1598 welding standard, therefore offering all the necessary requirements to achieve a safe welding environment.

STOCK COLOUR	RED, CLEAR
OUTER FRAME DIMENSIONS	1460MM (4FT 8") W X 1900MM (6FT 3") H
FRAME TYPE	32.9MM DIAMETER POWDER COATED STEEL TUBE FRAME
PVC CURTAIN DIMENSIONS	1415MM (4FT 6") W X 1580MM (5FT1") H
CURTAIN FROM FLOOR	320MM
PVC CURTAIN THICKNESS	0.4MM (EN1598 APPLIES TO RED)
OUTER CARTON	1720MM L X 265MM D X 100MM H



Certificate Number: 14352
 ISO 9001



Care should be taken in selecting the most suitable quality for each application. Advice is available, but final responsibility remains with the customer.

www.epdm.co.uk

E-Mail: Sales@epdm.co.uk

Contact

Telephone: +44 (0)1625 573971
 FAX: +44 (0)1625 573250
 Munsch & Co/PTM Ltd
 Units AG2/3 Clarence Mill
 Clarence Road, Bollington
 Macclesfield, Cheshire
 SK10 5JZ
 United Kingdom